


## Conector modular fêmea para PCI / PCB modular jack connector

### TF

Código / Code 90°	Código / Code 180°	Vias / Ways	Contatos / Contacts
TFN-44*P	TFC-44*	4P	4C
TFN-62*P	-	6P	2C
TFN-64*P	TFC-64*	6P	4C
TFN-66*P	TFC-66*	6P	6C
TFN-88*P	TFC-88*	8P	8C

\* Cor e cobertura / Color and flash finish  
**P** - Preta com 6μ" de ouro / Black with 6μ" gold flash finish  
**C** - Cinza com 6μ" de ouro / Gray with 6μ" gold flash finish  
**CL** - Cinza claro com 6μ" de ouro / Light gray with 6μ" gold flash finish

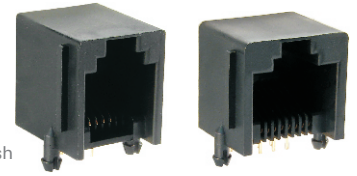

## Especificações / Specifications

Corrente máxima / Current rating	2 A
Tensão máxima / Voltage rating	125 VCA / VCC (VAC / VDC)
Resistência de contato máx. / Maximum contact resistance	20 mΩ
Resistência de isolamento mín. / Minimum insulation resistance	10 MΩ
Rigidez dielétrica / Withstanding voltage	1000 VCA / VAC (1 minuto / minute)
Temperatura de operação / Operate temperature range	-25°C a (to) +125°C
Material do isolador / Insulator material	PBT UL94V-0
Material dos contatos / Contact material	Bronze fosforoso com 6μ" de Au / Phosphor bronze with 6μ" gold flash finish

