

1

2

3

4

5

6

7

8

A





B

C

D

E

F

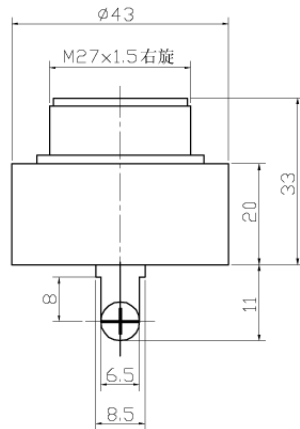

SPECIFICATION

- 1. Rated Voltage230VAC
- 2. Operating Voltage200~240VAC
- 3. Max. Rated Current20mA at 230VAC/DC
- 4. Min. Sound Pressure Level80dB at 230VAC/60cm
- 5. Tone NatureFast Pulse
- 6. Resonant Frequency2.9±0.5KHz
- 7. Case MaterialABS
- 8. Operating Temperature-20~+60°C
- 9. Store Temperature-30~+70°C
- 10. Weight40g

				KEPO KEPO ELECTRONIC CO., LTD. http://www.kepo.com.tw	
				Piezo Buzzer KPI-4322-230	
No.	DESCRIPTION	APPROVED	DATE		
TOLERANCES UNLESS NOTED OTHERWISE: X .° XX .° XXX .° 90° FORMED -2° ANGLES -4° FIRST ANGLE PROJECTION		APPROVALS	DATE	UNIT	DWG NO.
		DRAWN		mm	KP3.840.104
		CHECKED		SCALE	SHEET
		APPROVED	05.07.28	NOT TO SCALE	VER 1.1

1

2

3

4

5

6

7

8