


Datasheet

Art.No. 70.331.1035.1

Bottom BAS GUT GC 10 M20 A1

revos BASIC size 10 closed-bottom base with threaded collar M20, left double locking lever

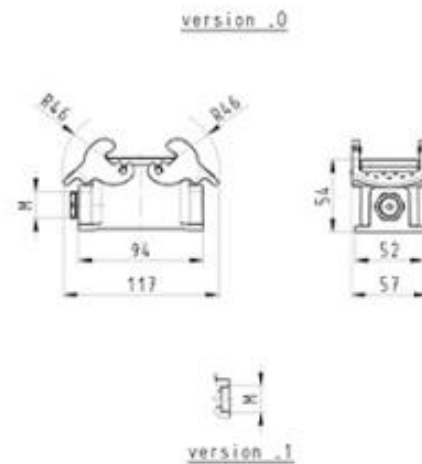

Art.No.	70.331.1035.1
EAN	4015573599550
Order unit	1 pieces

Approvals



Technical data

General

Housing material	Aluminium
Colour	Grey
Surface	With powder coating
Degree of protection (IP)	Other
UV resistant	Yes
Inflammability class of insulation material acc. with UL94	Other
Operating temperature range min.	-40 °C
Operating temperature range max.	120 °C



Model

DIN-size	10
Model	Surface mounting (base)
Locking mechanism	Double locking levers
Cable entry	Sideways
Type of cable	Thread
With cable screw gland	No
Thread size M	20
Thread size PG	
Hinged lid	No
EMC-version	No
Length	94 mm
Width	52 mm
Height	55 mm

Classification

ECLASS 8.1	27440202
ETIM 6.0	EC000437
ETIM 5.0	EC000437
ETIM 4.0	EC000437
ETIM 3.0	EC000437


Drawings

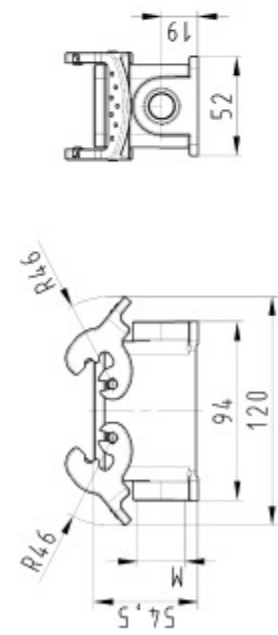Varianten/Variants
.0



Bohrbild
/Cut out



70.331.1035.1	BAS GUT 6C 10 M25	M20 A1	Open induction ring /Thread hole	X
70.335.1035.0	BAS GUT 6C 10 M25	A0	KabelverschraubungskV, PSL montiert /Cable gland kit, PSL assembled	
Bestellnummer /Order number			Typ /Type	An- /Front

Weitere Daten siehe KATALOG oder eKatalog.
Additional data see CATALOG or eCatalog.
www.wieland-electric.com
eshop@wieland-electric.com

Bohrung Size 10 TUBED/Drilling size 10 TUBED
The dimensions of the holes are given in mm. The dimensions of the holes are given in mm. The dimensions of the holes are given in mm.
The dimensions of the holes are given in mm. The dimensions of the holes are given in mm. The dimensions of the holes are given in mm.