


Features

- 2 Form C(DPD) bifurcated crossbar contacts
- Dip-2c type matching 16 pin Ic socket

PCB Relay

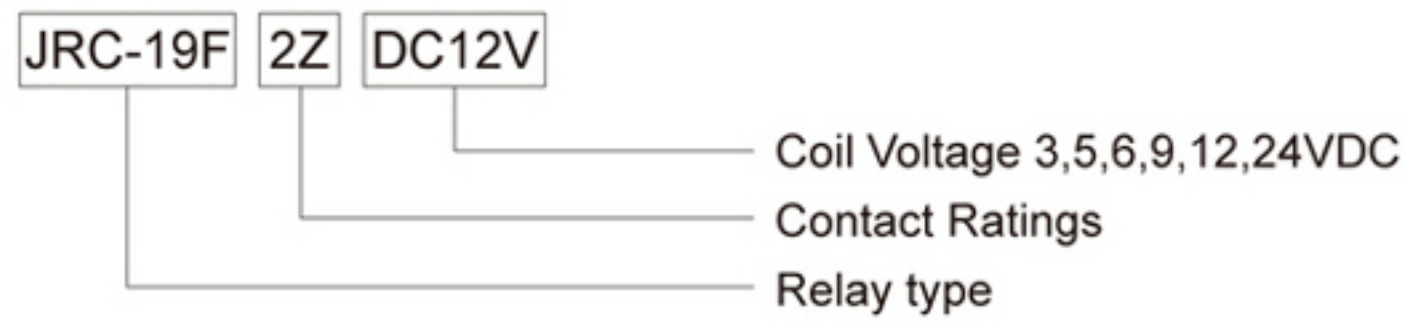

Contact Ratings

Contact Ratings	2Z 2A
Contact Resistance	100mΩ (at 1A 6VDC)
Contact Material	Silver Alloy
Contact capacity	1 A 125VAC 2A 24VDC

Specification


Insulation Resistance	100MΩ .500VDC
Dielectric Strength	BCC 1000V 1 min
	BOC 600V 1 min
Operate Time	6ms/4ms
Terminal Type	PCB

Coil Ratings

Nominal Coil Power	0.15W,0.2W,0.36W,0.45W
--------------------	------------------------

Coil Versions


Nominal Voltage VDC	Coil Resistance at 20°C ± 10%				Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.15W	0.2W	0.36W	0.45W			
3	60	45	25	20	2.25	0.3	3.9
5	167	120	70	56	3.75	0.5	6.5
6	240	180	100	80	4.50	0.6	7.8
9	540	400	220	180	6.75	0.9	11.7
12	960	720	400	320	9.00	1.2	15.6
24	3840	2880	1600	1250	18.00	2.4	31.2

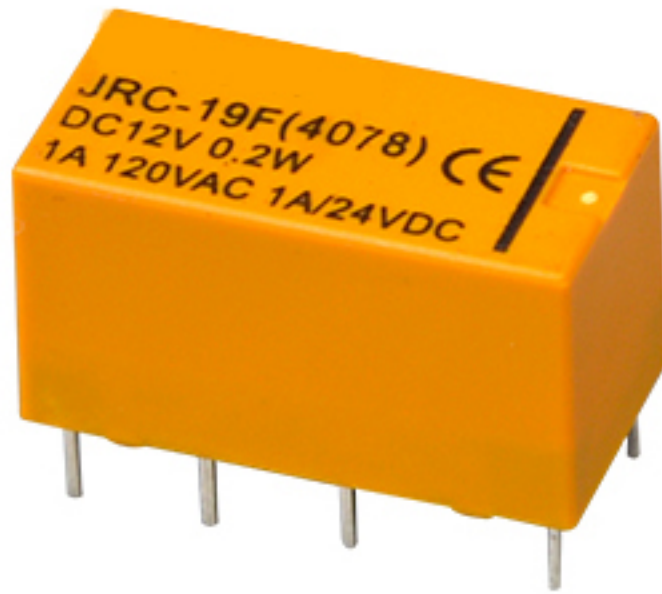

JRC-19F(4078)



Dimension.Bottom View

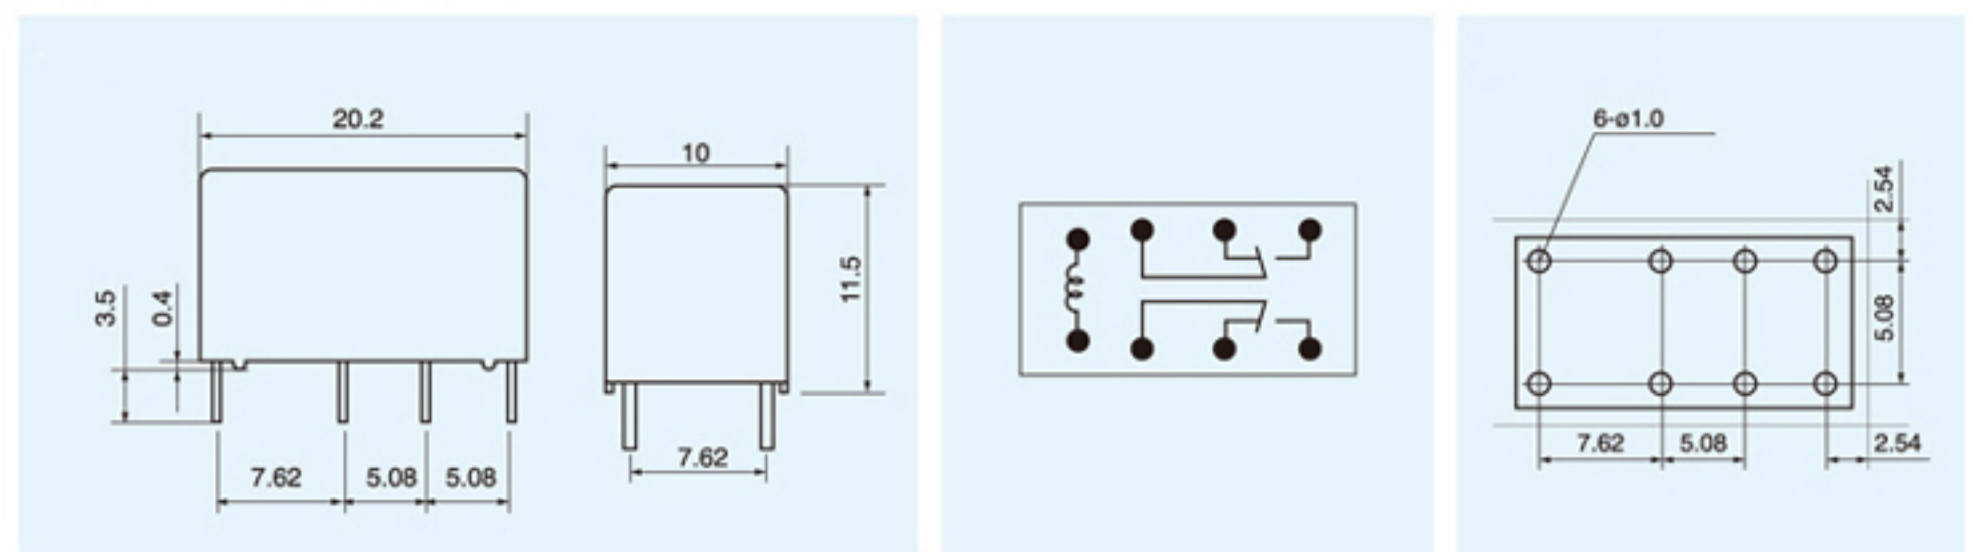

Reference Data

