


Data sheet

Commercial Art.No.: 56.704.5355.0

Fuse terminal WKFN 4 FSI LED 24

Fuse terminal with tension spring connection for mounting on TS 35, nominal cross section: 4 mm², width: 6 mm, color: grey

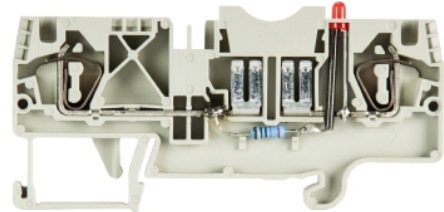

Commercial Art.No.	56.704.5355.0
EAN	4049088034978
Order Unit	100

Technical data

General

Nominal cross section	4 mm ²
Color	Grey
Number of levels	1
Width/grid dimension	6 mm
Insulating housing	PA666
Inflammability class of insulation material acc. with UL94	V0
Mounting method	DIN rail (top hat rail) 35/7.5 mm
Terminal blocks for electrical installations	No
Fuse insert	Blade fuse

Technical data

Rated voltage	24 V
Rated impulse voltage	6 kV
Pollution degree	3
Closing plate required	yes
Type of insulation material	Thermoplastic
Length	82.2 mm

Connection Data

Connection type 1	spring clamp connection
Connection type 2	spring clamp connection
Minimum cross section solid	0.13 mm ²
Maximum cross section solid	6 mm ²
Minimum cross section fine stranded	0.13 mm ²
Maximum cross section fine stranded	4 mm ²
Wire strip length	11 mm

Note

Remark to rated voltage	Note fuse insert
Remark to rated current	Note fuse insert
Defect indicator	LED

Voltage type for defect indication	AC/DC
Minimum operating voltage of defective display	12 V
Maximum operating voltage of defective display	24 V

Classification

ECLASS 11	
ECLASS 8.1	27141116
ETIM 7.0	EC000899
ETIM 6.0	EC000899
ETIM 5.0	EC000899
ETIM 4.0	EC000899
ETIM 3.0	EC000899

Product compliance

ROHS conformity status	Compliant
REACH-SVHC conformity status	Compliant