
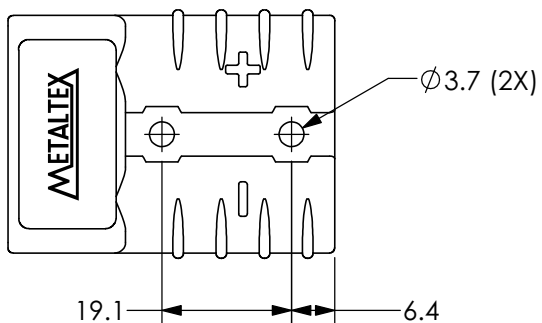
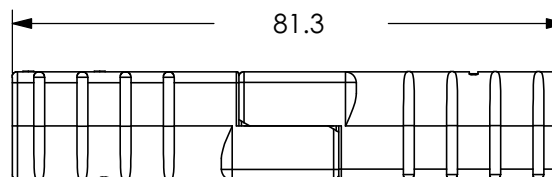




COLOR	P/N
GRAY	ME992
RED	ME992G1
BLACK	ME992G2
BLUE	ME992G4
YELLOW	ME992G5
GREEN	ME992G6
ORANGE	ME992G7

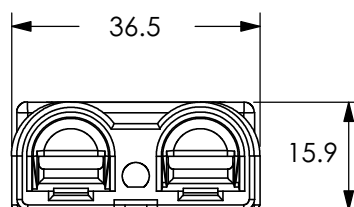

MATED PAIR

1. HOUSING ARE KEYED TO ONLY ALLOW MATING WITH THE SAME COLOR HOUSINGS EXCEPT FOR THE BLACK HOUSING
2. HOUSING ASSEMBLIES ACCOMODATE METALTEX CONTACTS FOR WIRE RANGES FROM 4MM² (#12 AWG) TO 16MM² (#6 AWG).

DIMENSIONS ARE IN: MM					
UNLESS OTHERWISE STATED					
TOLERANCES: DECIMALS (MM) ANGLES .X ± .5 ±2 °		ME50 series bipolar housings (with integrated contact retention springs)			
MATERIAL: SPRINGS: STAINLESS STEEL HOUSINGS: PC, UL94 V-0					
FINISH:					
 3rd ANGLE ISO SECTION		SCALE NONE	DWG NO. ME50 Housings	REV. 0	SHEET 1 OF 2

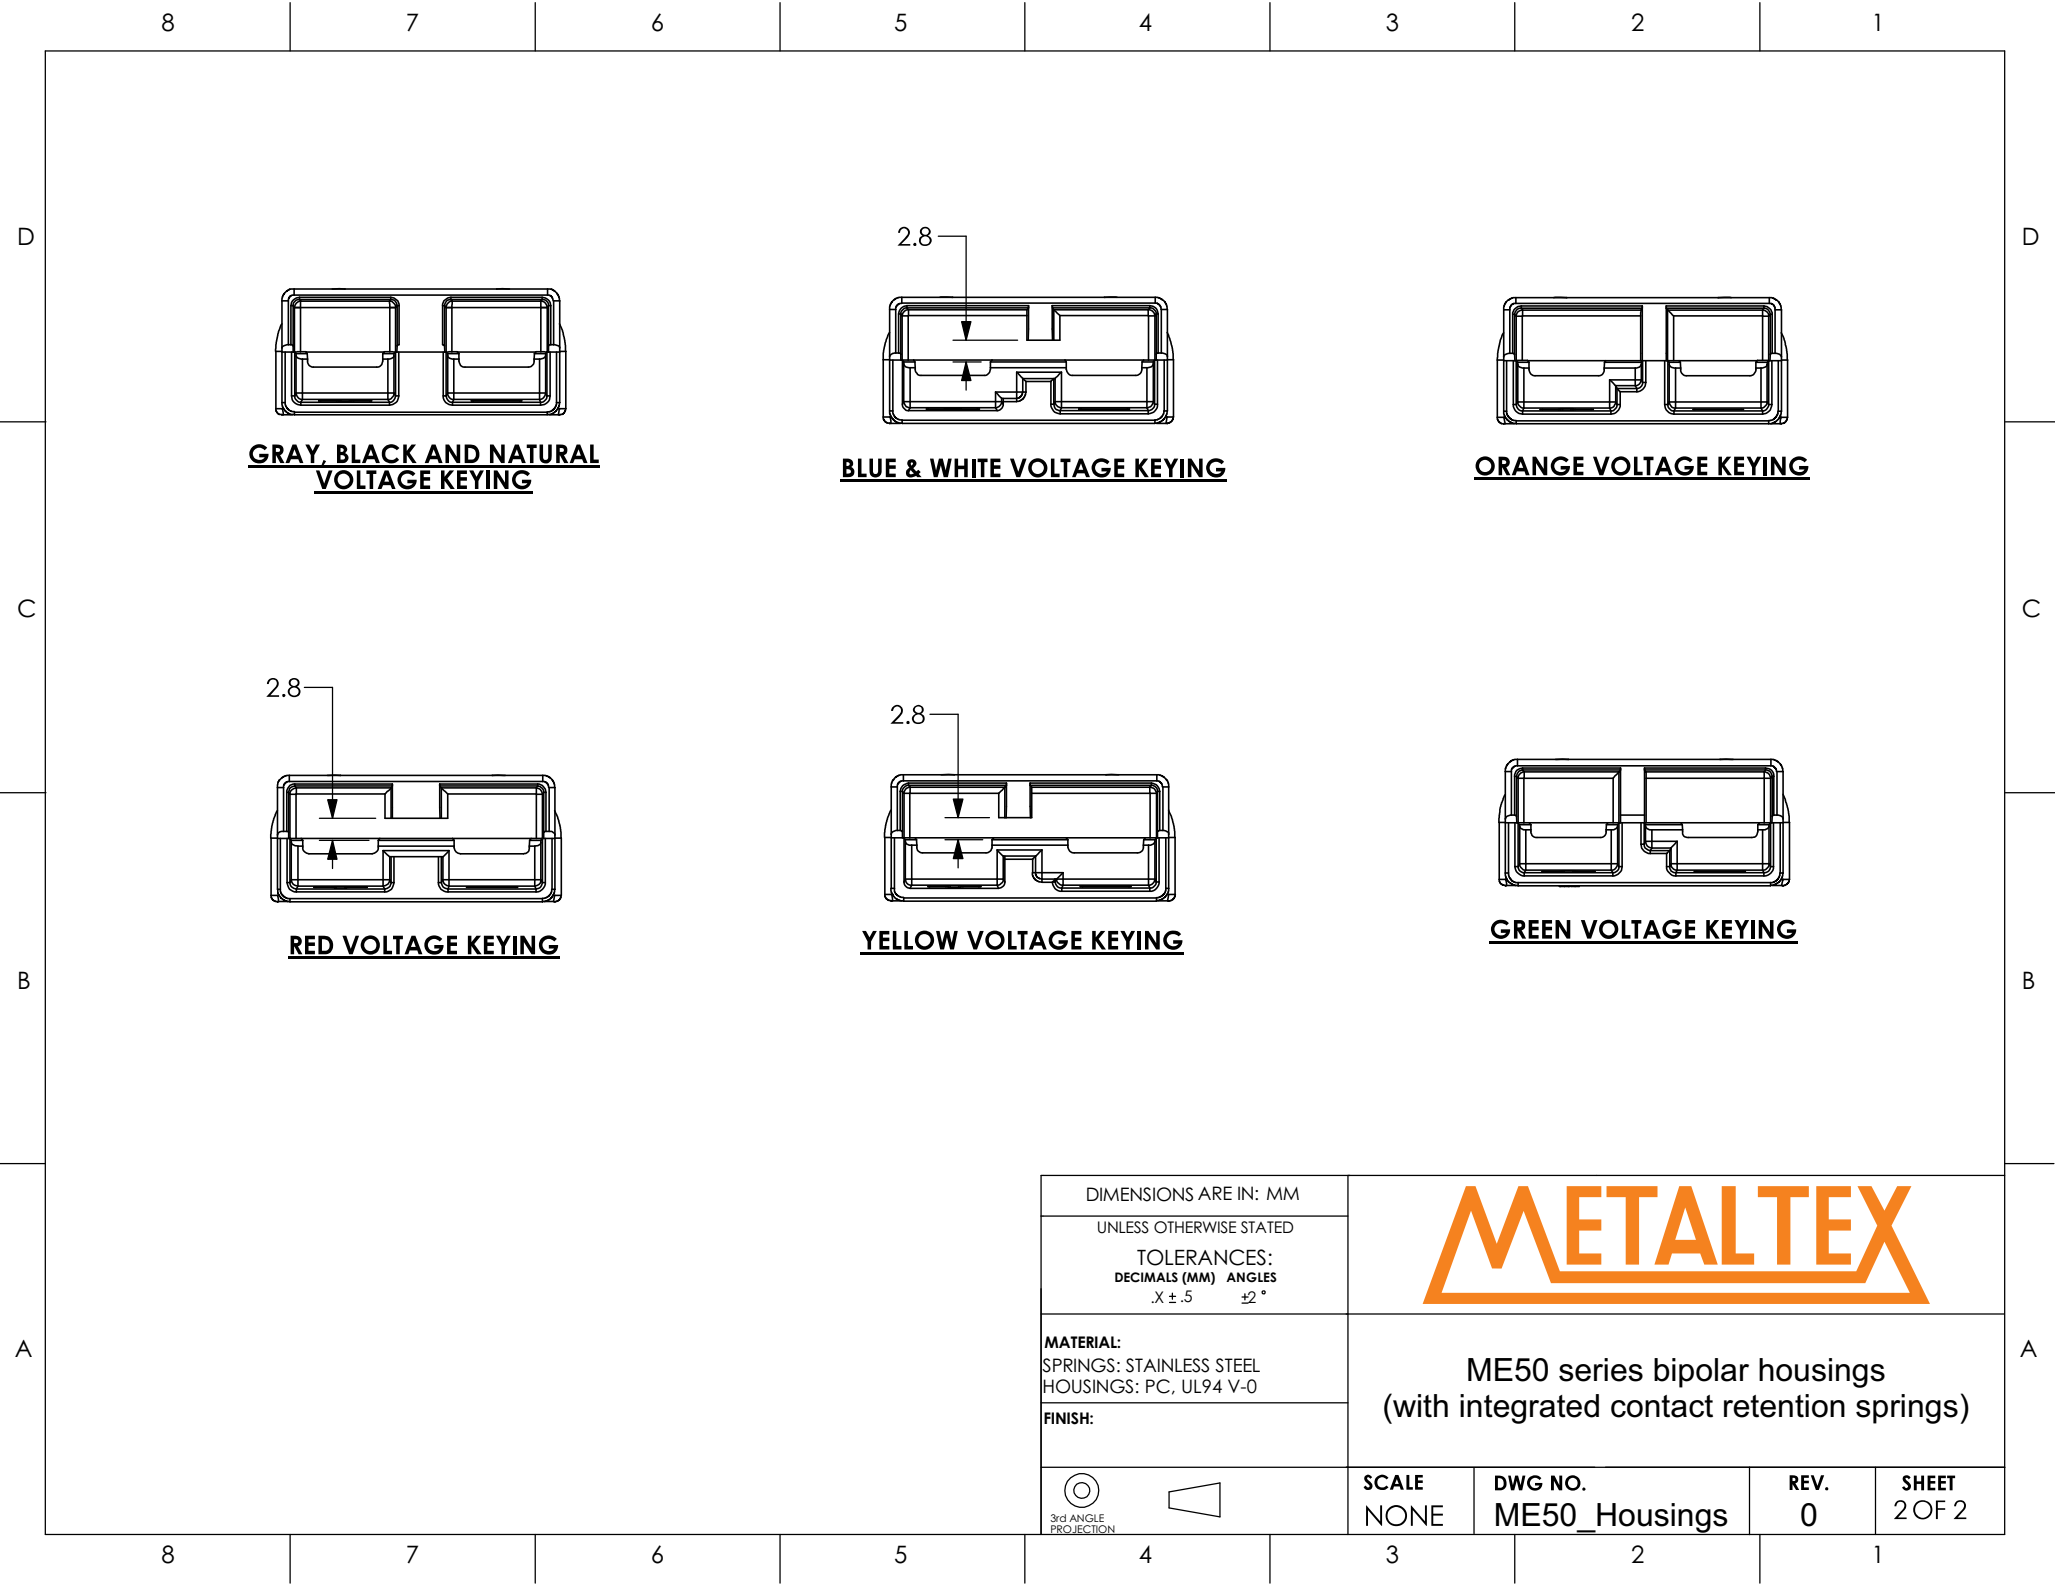

**GRAY, BLACK AND NATURAL
VOLTAGE KEYING**

BLUE & WHITE VOLTAGE KEYING

ORANGE VOLTAGE KEYING

RED VOLTAGE KEYING

YELLOW VOLTAGE KEYING

GREEN VOLTAGE KEYING

DIMENSIONS ARE IN: MM					
UNLESS OTHERWISE STATED					
TOLERANCES: DECIMALS (MM) ANGLES .X ± .5 ±2 °					
MATERIAL: SPRINGS: STAINLESS STEEL HOUSINGS: PC, UL94 V-0		ME50 series bipolar housings (with integrated contact retention springs)			
FINISH:					
		SCALE NONE	DWG NO. ME50_Housings	REV. 0	SHEET 2 OF 2