


CM162-10SKDAA-5-01

1. Mechanical Specification

ITEM	STANDARD VALUE			UNIT
NUMBER OF CHARACTERS	16 CHARACTERS X 2 LINES			--
CHARACTER FORMAT	5 X 8 DOTS			--
MODULE DIMENSION	84.0 (W) X 44.0 (H) X 12.0 (T)			mm
VIEWING DISPLAY AREA	64.6 (W) X 13.8 (H)			mm
ACTIVE DISPLAY AREA	54.84 (W) X 11.14 (H)			mm
CHARACTER SIZE	2.94 (W) X 5.38 (H)			mm
CHARACTER PITCH	3.46 (W) X 5.76 (H)			mm
DOT SIZE	0.54 (W) X 0.62 (H)			mm
DOT PITCH	0.06 (W) X 0.06 (H)			mm
DRIVE METHOD	1/16 Duty , 1/5BIAS			
VIEWING DIRECTION	6 O'clock			
LED Backlight Color	Green			
Backlight Input	DC +5.0V	V		mA
LED backlight current	10			mA
Backlight Half-Lift Time	35,000			HR.
INPUT VOLTAGE	DC +5.0V	V	1	mA
LCD DRIVER	SPLC780D			
Weight				

2. Mechanical Diagram

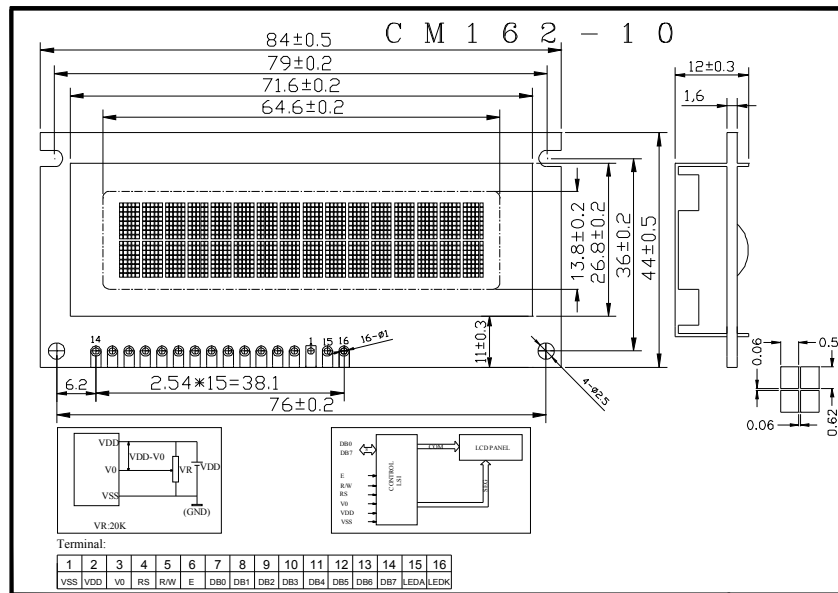

CM162-10SKDAA-5-01

3. Interface Pin Connections

NO	SYMBOL	LEVEL	FUNCTION
1	VSS	--	GND (0V)
2	VDD	--	DC +5V
3	VO	--	Contrast Adjust
4	RS	H/L	Register select
5	R/W	H/L	Read/Write
6	E	H,H→L	Enable signal
7	DB0	H/L	Data Bit 0
8	DB1	H/L	Data Bit 1
9	DB2	H/L	Data Bit 2
10	DB3	H/L	Data Bit 3
11	DB4	H/L	Data Bit 4
12	DB5	H/L	Data Bit 5
13	DB6	H/L	Data Bit 6
14	DB7	H/L	Data Bit 7
15	LED A	--	+5V (LED Backlight 1)
16	LED K	--	0V(LED Backlight 2)

4. Absolute Maximum Ratings

ITEM	SYMBOL	MIN.	TYPE	MAX.	UNIT
OPERATING TEMPERATURE	TOP	0/-20	--	+50/+70	°C
STORAGE TEMPERATURE	TST	-10/-30	--	+60/+80	°C
INPUT VOLTAGE	VI	4.75	5.0	5.25	V
SUPPLY VOLTAGE FOR LOGIC	VDD-VSS	--	5.0	5.5	V
SUPPLY VOLTAGE FOR LCD	VDD-VO	--	--	5.0	V
STATIC ELECTRICITY	Be sure that you are grounded when handing LCM.				